



Captair Smart

Ductless filtering fume hoods

Life in the lab becomes *Simpler Safer*



Captair Smart

Ductless Filtering Fume Hoods

Erlab's innovative technology keeps you safe

Erlab's unique Flex Filtration can manage most lab applications

Sensors to detect filter saturation

Face velocity is automatically monitored

The 6° slanted sash offers optimal visibility and an ergonomic work space

Large openings for easy access to your work




Download the eGuard App for remote control and monitoring



SMART TECHNOLOGY

Simple, intuitive communication by light shows the status of the hood

Very low energy consumption - Reduced running costs



Life in the laboratory becomes simpler and safer

Simpler to use *Safer* to operate

Erlab's 45 years of expertise in research, design and manufacturing of filtering fume hoods guarantee superior filtration that will keep you protected during your chemical processes.

Smart Technology: The new Captair Smart ductless filtering fume hoods are designed with a simple and innovative way of communication. Smart Technology uses simple light to show that the hood is operating safely so you can focus your attention on what is most important: your work.



Filtration

Demand the best filtration quality



Simple to use

A single activation key



Safety

A powerful communication interface via light pulses to enhance safety.




Connectivity

Connect your device and monitor its use remotely via our mobile solutions.

Simpler to use

- SMART technology informs users about their protection using light and sound .
Light and sound pulses give real time information about:

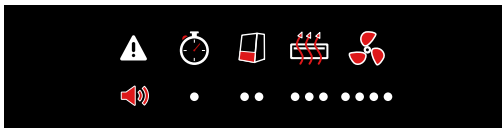

Fume hood working time
Air face velocity
Filters saturation
Ventilation parameters

- The eGuard App gives you remote control to monitor the hood, change the settings, and delivers safety alerts immediately to your mobile, tablet or PC device.

Safer to operate

- The configurable filtering system above the enclosure can be adapted to filter gases, solvents, powders and particulates keeping the user and the lab protected by safely and efficiently recirculating air within the room and releasing purified air back into the room free of any toxic hazardous vapors or odors
- Meets AFNOR NFX 15 211/ANSI Z9.5-2012 filtration efficiency standard (classes 1 and 2).
- New sensors are added for detection of solvents or acids or formaldehyde.
- New electronic anemometer monitors face velocity
- ESP Program: Usage certification delivered with each unit after approval of your handlings or process by our in-house lab.

Specifications



Model	321	391	481	392	483	633	714
Width (mm - inch)	780 (30 ^{3/4})	1005 (39 ^{5/8})	1260 (49 ^{5/8})	1005 (39 ^{5/8})	1280 (50 ^{3/8})	1604 (63 ^{1/8})	1805 (71)
Depth (mm - inch)	620 (24 ^{3/8})			749 (29 ^{1/2})			
Height min - max (mm - inch)	1110 (43 ^{3/4}) - 1285 (50 ^{5/8})			1340 (52 ^{3/4}) - 1515 (59 ^{5/8})			
Air Flow	220 m ³ /h - 129 CFM			440 m ³ /h - 259 CFM	660 m ³ /h - 388 CFM		880 m ³ /h - 518 CFM
Sash type	The oblong shape allows for proper containment and ergonomic mobility			Adjustable sash provides an ergonomic position for the user When using large equipment without compromising containment			
Safety Standards	AFNOR NF X 15-211:2009 : France - BS 7989 : England DIN 12 927 : Germany - EN 1822 : 1998 (HEPA H14 & ULPA U17 Filters) - CE Marking						
Air Face Velocity	0,4 to 0,6 m/s - 79 fpm to 118 fpm						
Power consumption	65 W			105 W	160 W		220 W
Voltage/Frequency	90 - 220 V / 50-60 Hz						
Structure	Corrosion resistant electro-galvanized steel coated with anti-acid polymer						
Side and front panels	Chemical resistant acrylic						
Filtration module	Polypropylene						

Features

Smart-Light	When the light is pulsing: indicates that containment is compromised, or there is filter breakthrough, or there is a fan failure
Filtration Technology	1 - 4 columns that can be configured to handle liquids, powders or both
Carbon filtration for gases and vapors	AS : For organic vapors - BE+ : For organic vapors and acid vapors F : For formaldehyde vapors - K : For ammonia vapors
Particulate filtration for powders	HEPA H14 filtration efficiency: 99,995 % according to MPPS method, EN1822 standard ULPA U17 filtration efficiency: 99,99995 % according to MPPS method, EN1822 standard
eGuard app (Android or iOS)	App for remote control to monitor the hood status, change the settings, and deliver safety alerts immediately to your devices (mobile, tablet and PC).
Connectivity*	RJ45 cable connection to view and change hood settings
Molecode	Detection sensor: Type S ,for solvents / Type A, for acids / Type F for formaldehydes
Internal lighting	LED lighting > 650 Lux
Anemometer	Hot-wire anemometer will alarm if the the face velocity decreases
Chemical Listing	List of most commonly used chemicals (NIOSH) and their retention capacity by our filters

Accessories

Work Surfaces	Trespa® Top Lab ^{plus} , Glass or 304L Stainless Steel	
Benches	Rolling cart (Mobicap) or fixed bench (Benchcap)	Fixed Bench (Benchcap)
Bench equipment	Technical gases outlets, water outlets, front control valves, sink, power sockets (Only compatible with Phenolic resin worktop and fixed bench)	
Particulate Pre-filter	Protects the main filter(s) from dust	
Wasteport	Double-bag with protected housing	
Transparent Back Panel	Clear acrylic panel for easy viewing	

*Cable included

France
+33 (0) 2 32 09 55 80 | ventes@erlab.net

USA
+1 800-964-4434 | captairsales@erlab.com

China
+86 (0) 512 5781 4085 | sales.china@erlab.com.cn

Malaysia
+60 (0) 7 3 555 724 | erlab@tm.net.my

Germany
0800 330 47 31 | verkauf@erlab.net

United-Kingdom
+44 (0) 1722 341 940 | salesuk@erlab.net

Italy
+39 (0) 2 89 00 771 | vendite@erlab.net

Spain
+34 93 673 24 74 | ventas@erlab.net

