

The Built-In Laboratory Undercounter Refrigerator features a microprocessor temperature controller and display, which allows for precise temperature control, verification and recovery versus mechanical style thermostats. An interior fan driven, forced-draft air circulation system provides excellent temperature uniformity and recovery after door openings.

The standard temperature display and alarm module offers product security with a monitoring and alarm system. Real-time sample simulated temperatures are constantly displayed and supported by audible/visual high and low temperature alarms. Remote alarm dry contacts and an access port are provided to simplify connections to existing facility monitoring systems.

The Undercounter Built-in models (“UCBI”) are designed with a “front-breathing” ventilation system, eliminating the need for clearance around the top and sides of the unit; enabling the user to incorporate these units into cabinets and other applications where free space is limited.

Features

- Microprocessor Temperature Controller
- Adjustable operating temperature range: 1°C to 10°C
- Digital temperature display with sample simulated probe
- Remote alarm contacts
- Forced draft air circulation
- Back wall evaporator cover
- Keyed door lock
- Magnetic door gasket for positive seal
- LED interior lights are safety shielded and switch controlled
- Probe access port ($\frac{3}{8}$ ")
- HFC-free refrigerant (**R600a**), foam insulation and packaging
- ADA Compliant
- Cycle defrost
- Two year parts and labor warranty, plus and additional three year compressor parts warranty
- UL/C-UL listed
- **NOTE: All products are designed to operate in ambient room temperatures not to exceed 75°F/50% RH (relative humidity). Failure to maintain these conditions may result in operational and/or performance issues**






- Digital temperature display
- Digital microprocessor
- Audible and visual alarms
- Resettable Min/Max
- Remote alarm contacts



Keyed Door Lock

Front Breathing Technology allows for "Built-in" Use

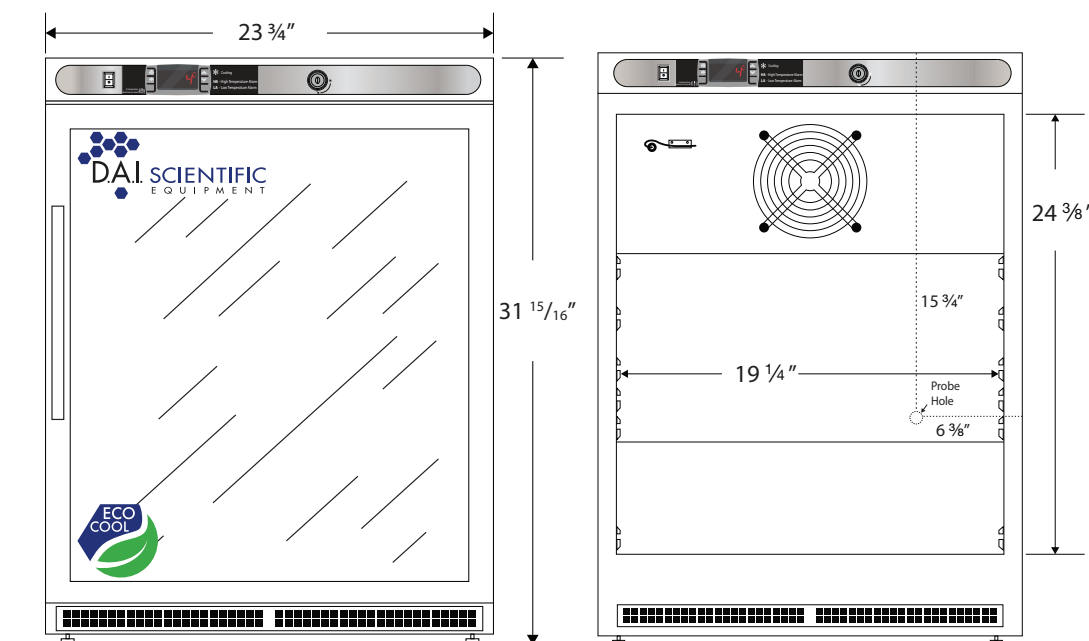

32" HEIGHT MEETS ADA GUIDELINES

Model	Ft ³	Defrost	Doors	Shelves	W"	D"	H"	RL	H.P.	Amps
DAI-HC-UCBI-0404G-ADA	4.6	Cycle	1 Glass	2 Adj./1 Fixed	$23 \frac{3}{4}$	$25 \frac{1}{2}$	$31 \frac{15}{16}$	R600a	$\frac{1}{8}$	1.74

Specifications are subject to change