

Compact Pharmacy Refrigerators are purpose-built for scientific and medical applications. To improve performance, Compact Pharmacy Refrigerators feature a digital microprocessor temperature controller allowing for the precise temperature management necessary for critical samples and supplies. A forced air directional refrigeration system provides superior temperature uniformity and recovery after door openings. An automatic cycle-defrost design prevents product damaging temperature spikes.


The standard temperature display and alarm module offers product security with a monitoring and alarm system. Real-time sample simulated temperatures are constantly displayed and supported by audible/visual high and low temperature alarms. Remote alarm dry contacts and an access port are provided to simplify connections to existing facility monitoring systems.

Freestanding models require 4" of clearance around back and sides of the unit for proper ventilation. Improper installation will void the warranty and will lead to temperature maintenance issues, overheating and possible failure.

Features

- Microprocessor Temperature Controller
- Adjustable operating temperature range: 36°F to 46°F (2°C to 8°C)
- Standard Digital Temperature Display and Alarm Module with battery back-up to support temperature monitoring and alarms
- Remote alarm contacts
- Forced draft air circulation
- Keyed door lock
- Back wall evaporator cover
- Magnetic door gasket for positive seal
- Heavy duty door handle
- LED interior light
- Six adjustable and one bottom footed shelf with guard rail to prevent product from being pushed against back wall
- Leveling legs
- Probe access port (3/8")
- Vaccine storage power cord warning label
- Pharmacy refrigerator/freezer toolkit and temperature logs
- Temperature Monitor Device - complies with the current CDC guidelines, 3 years certification of calibration, "buffered" probe in the product simulated solution, min/max memory, °F/°C switchable, field installable, and visual & audible temperature alarms
- HFC-free refrigerant (**R600a**), foam insulation and packaging
- Cycle defrost
- Pyxis®, Omnicell® and AcuDose RX® compatible
- Two year parts and labor warranty, plus an additional three year compressor parts warranty
- UL/C-UL listed
- **Note: Units must have 4" clearance on sides and back for adequate ventilation**
- **Note: All products are designed to operate in ambient room temperature not to exceed 75°F/50% RH (relative humidity). Failure to maintain these conditions may result in operational and/or performance issues**



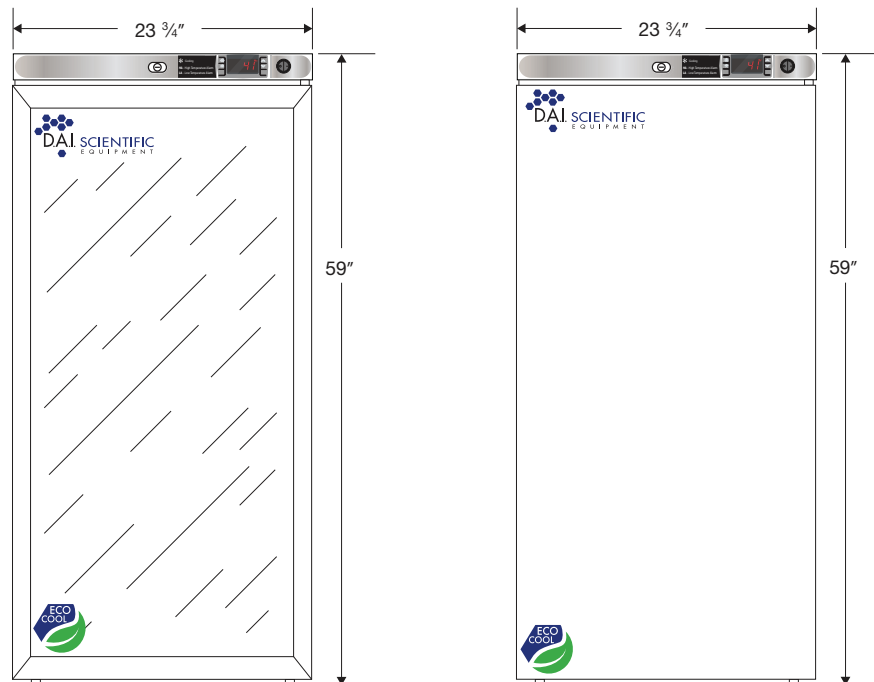

NOTE: Model require 4" of clearance around back and sides of the unit for proper ventilation. Improper installation will void the warranty and will lead to temperature maintenance issues, overheating and possible failure.

NOTE: Ventilation Requirements – Minimum 4" clearance on sides and back

Model	Ft ³	Defrost	Doors	Shelves	W"	D"	H"	RL	H.P.	Amps
PH-DAI-HC-10PG	10.5	Cycle	1 Swing Glass	6 Adj.	23 3/4	26 1/2	59	R600a	1/3	2.3
PH-DAI-HC-10PS	10.5	Cycle	1 Swing Solid	6 Adj.	23 3/4	26 1/2	59	R600a	1/3	2.3

Specifications are subject to change