

Freestanding Pharmacy Undercounter Refrigerators feature a microprocessor temperature controller and display, which allows for precise temperature control, verification and recovery versus mechanical style thermostats. An interior fan driven, forced-draft air circulation system provides excellent temperature uniformity and recovery after door openings.


The standard temperature display and alarm module offers product security with a monitoring and alarm system. Real-time sample simulated temperatures are constantly displayed and supported by audible/visual high and low temperature alarms. Remote alarm dry contacts and an access port are provided to simplify connections to existing facility monitoring systems.

**Freestanding models ("UCFS") require 4" of clearance around back and sides of the unit for proper ventilation. Improper installation will void the warranty and will lead to temperature maintenance issues, overheating and possible failure.**

## Features

- Microprocessor Temperature Controller
- Adjustable operating temperature range: 36°F to 46°F (2°C to 8°C)
- Digital temperature display with sample simulated probe
- Remote alarm contacts
- Forced draft air circulation
- Back wall evaporator cover
- Keyed door lock
- Magnetic door gasket for positive seal
- Heavy duty door handle
- LED interior lights are safety shielded and switch controlled
- Probe access port (3/8")
- HFC-free refrigerant (**R600a**), foam insulation and packaging
- Cycle defrost
- ADA Compliant units available
- Pharmacy refrigerator/freezer toolkit and temperature logs
- Vaccine storage power cord warning label
- Temperature Monitor Device - complies with the current CDC guidelines, 3 years certification of calibration, "buffered" probe in the product simulated solution, min/max memory, °F/°C switchable, field installable, and visual & audible temperature alarms
- Pyxis®, Omnicell® and AcuDose RX® compatible
- Two year parts and labor warranty, plus and additional three year compressor parts warranty
- UL/C-UL listed
- **NOTE: Units must have 4" clearance on sides and back for adequate ventilation**
- **NOTE: All products are designed to operate in ambient room temperatures not to exceed 75°F/50% RH (relative humidity). Failure to maintain these conditions may result in operational and/or performance issues**



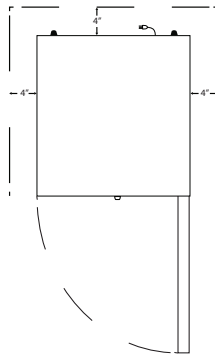

**NOTE:** Freestanding models ("UCFS") require 4" of clearance around back and sides of the unit for proper ventilation. Improper installation will void the warranty and will lead to temperature maintenance issues, overheating and possible failure.




- Digital temperature display
- Digital microprocessor
- Audible and visual alarms
- Resettable Min/Max
- Remote alarm contacts

Adjustable shelves



Keyed Door Lock

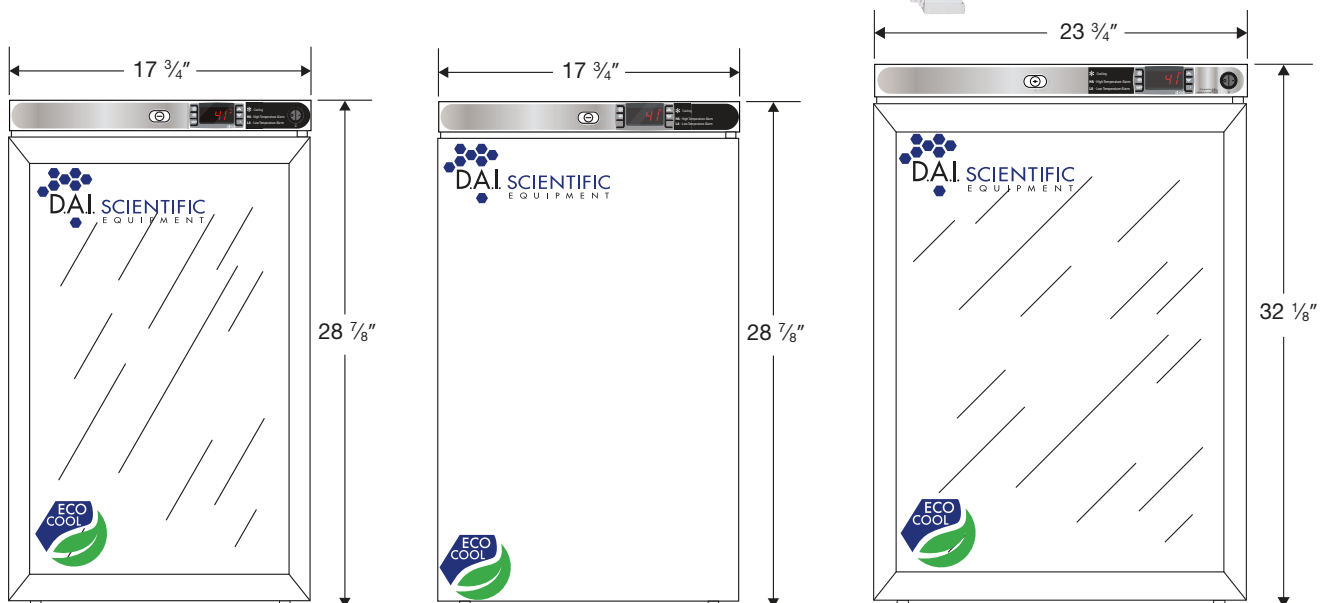

**NOTE: Ventilation Requirements – Minimum 4" clearance on sides and back**

Model	Ft'	Defrost	Doors	Shelves	W"	D"	H"	RL	H.P.	Amps
PH-DAI-HC-UCFS-0204G	2.5	Cycle	1 Glass	4 Adj.	17 3/4	19 1/2	28 7/8	R600a	1/8	.90
PH-DAI-HC-UCFS-0204	2.5	Cycle	1 Solid	4 Adj.	17 3/4	19 1/2	28 7/8	R600a	1/8	.90
PH-DAI-HC-UCFS-0504G	5.2	Cycle	1 Glass	3 Adj.	23 3/4	24	32 1/8	R600a	1/8	1.3

*Specifications are subject to change*